

RECON FDE

60460 01-A

O2 WR SRC HRO

EN ISO 20347:2012



UPPER Water-repellent and breathable polyester jacquard fabric. Cut resistant, anti-fraying, rip and abrasion resistant . Waterproof KPU reinforcement in the inner fast rope , in the metatarsal, toe cap, heel and ankle Pocket to store the strings.

LINING **PLASMAFEEL** breathable, antibacteria 3D fabric, resistant to wear and abrasion coupled with the waterproof and breathable **IN-DRY** membrane that unlike traditional sock lining, is applied directly on the upper and integrally seals all seams creating a barrier to water and keeping the foot warm and dry.

INSOLE **ACTIVE** - Made from recycled materials. Thermoformed in dual-density polyurethane with a tear resistant multilayer fabric. High breathability and quick absorbing thanks also to a special puncturing in the forepart, for a foot that is always dry. Antistatic, antibacterial, anti fungus, the presence of activated carbon keeps the foot free from bad smells. Complete with shock-absorbing heel support to reduce impacts on the entire spine and arch support to ensure greater comfort.

SOLE **PU / VIBRAM® - BASF PUR Elastopan®** polyurethane foam insole, ensures the maximum comfort and the absorption of the impact on all surfaces . **VIBRAM®** outsole, with an elevated grip, resistant to up to a 300°C (HRO certified), guarantees the maximum levels of slip resistance . Resistant to corrosion by oils and hydrocarbons. It leaves no mark on the surface.

LAST **ANATOMIC SOLE** The anatomical last of the injected sole, unlike removable insoles, is inalterable for the entire lifetime of the shoe . The Anatomic sole, following the natural morphology of the foot, provides a natural support to all its points, ensuring maximum comfort

ANTI-PEFORATION MIDSOLE **TEXON ENIGMA ZERO HT2** Non-metallic antistatic, flexible, anti-perforation fabric insole, built with several layers of high-tenacity fibres. Compliant with: EN 12568:2012; EN ISO 20344/345; CSA-Z195-14; ASTM F2413-18

ANTI-TORSION SUPPORT **COMPOSHANK** Anti-torsion support in ABS. It is applied between the antiperforation midsole and the midsole, corresponding to the arch of the foot. It improves stability on ladders, where foot support is not complete.

ANTI-STATIC DEVICE **SILVER STRIP DISCHARGE (SSD)**. Conductive cotton tape and silver threads inside the upper and in contact with the foot. It is an anti-static device that guarantees greater safety than the standard, increases the dispersive capacity of the electrostatic charges throughout the life of the shoes.


WEIGHT SIZE 42 740 gr

SIZE 38-48

BOOT HIGHT 15,24 cm - 6 inch



FEATURES

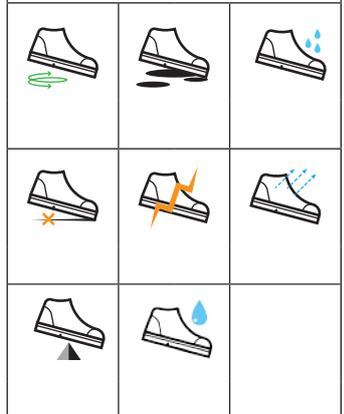

PLUS



TECNOLOGIE

